SUBSTITUTE FORM PTO-1390 U.S DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER
12758-022001

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)
09/806134

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/DE99/03168	1 October 1999	6 October 1998

TITLE OF INVENTION
METHOD AND RADIO COMMUNICATIONS SYSTEM FOR TRANSMITTING DATA OVER A RADIO INTERFACE BETWEEN A BASE STATION AND A SUBSCRIBER STATION

APPLICANT(S) FOR DO/EO/US
Volker Sommer and Armin Sitte

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
   a. ☒ is attached hereto (required only if not communicated by the International Bureau).
   b. ☐ has been communicated by the International Bureau.
   c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
   a. ☐ are attached hereto (required only if not communicated by the International Bureau).
   b. ☐ have been communicated by the International Bureau.
   c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
   d. ☒ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other documents or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
    ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

☐
☐
☐
☐
☐

CERTIFICATE OF MAILING BY EXPRESS MAIL Express Mail Label No EL245470163US

I hereby certify under 37 CFR §1 10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D C 20231

26 March 2001 — Date of Deposit
Samantha Bell — Signature
Samantha Bell — Typed Name of Person Signing

JC08 Rec'd PCT/PTO 26 MAR 2001

U.S. APPLICATION NO. (IF KNOWN) 09/806134	INTERNATIONAL APPLICATION NO. PCT/DE99/03168	ATTORNEY'S DOCKET NUMBER 12758-022001

17. ☒ The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)- (5)):

	CALCULATIONS PTO USE ONLY	
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **$1000**		
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **$860**		
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **$710**		
International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **$690**		
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **$100**		
ENTER APPROPRIATE BASIC FEE AMOUNT =	$ 860.00	
Surcharge of **$130** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		

Claims	Number Filed	Number Extra	Rate		
Total Claims	12 - 20 =	0	x **$18**	$0.00	
Independent Claims	2 - 3 =	0	x **$80**	$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ **$270**	$0.00	
TOTAL OF ABOVE CALCULATIONS =				$860.00	
☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.					
SUBTOTAL =				$860.00	
Processing fee of **$130** for furnishing the English Translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f))					
TOTAL NATIONAL FEE =				$860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). **$40.00** per property +					
TOTAL FEES ENCLOSED =				$860.00	
				Amount to be refunded:	$
				Charged:	$

a. ☒ A check in the amount of $860.00 to cover the above fees is enclosed.
b. ☐ Please charge my Deposit Account No. 06-1050 in the amount of $0.00 to cover the above fees. A duplicate copy of this sheet is enclosed.
c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Paul A. Pysher
FISH & RICHARDSON P.C.
225 Franklin Street
Boston, MA 02110-2804
(617) 542-5070 *phone*
(617) 542-8906 *facsimile*

P.A. Lichauco
SIGNATURE :
P.A. Lichauco for ~~Paul A. Pysher~~
NAME
41,942 40,780
REGISTRATION NUMBER

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Volker Sommer and Armin Sitte
Serial No. : Unassigned
Filed : Herewith
Title : METHOD AND RADIO COMMUNICATIONS SYSTEM FOR TRANSMITTING DATA OVER A RADIO INTERFACE BETWEEN A BASE STATION AND A SUBSCRIBER STATION

Art Unit : Unknown
Examiner : Unknown

Box PCT
Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Prior to examination, please amend the application as follows:

In the claims:

Amend claims 3-11 as follows:

--3. The method as claimed in claim 1, in which
the predetermined coding indicates the number of transmission channels which are used simultaneously between the base station (BS) and the subscriber station (MS).

4. The method as claimed in claim 1, in which
the data (d1, d2, d3) are transmitted via broadband transmission channels, and the predetermined coding indicates the spread factors (SF) used in the transmission channels.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL245470163US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner of Patents, Washington, D.C. 20231.

March 26, 2001
Date of Deposit

Samantha Bell
Signature

Samantha Bell
Typed or Printed Name of Person Signing Certificate

5. The method as claimed in claim 1, in which
the number (K) of blocks per service (S1, S2, S3) in each frame (fr) is signaled as an absolute statement.

6. The method as claimed in claim 1, in which
the number (K) of blocks per service (S1, S2, S3) in each frame (fr) is signaled relative to the statements for the preceding frame (fr).

7. The method as claimed in claim 5, in which
the number (K) of blocks per service (S1, S2, S3) is varied from frame (fr) to frame (fr) in steps of different size.

8. The method as claimed in claim 1, in which
the predetermined coding is defined on a system-wide basis.

9. The method as claimed in claim 1, in which
the predetermined coding is defined when setting up a connection between the base station (BS) and the subscriber station (MS).

10. The method as claimed in claim 1, in which
the predetermined coding minimizes the number of transmission channels per connection between the base station (BS) and the subscriber station (MS).

11. The method as claimed in claim 1, in which
the block size (B) is one bit.--

REMARKS

All amendments are to remove multiple dependencies. No new matter has been added.

Attached is a marked-up version of the changes being made by the current amendment.

Applicant submits that all of the claims are now in condition for examination, which action is requested. Please apply any charges or credits to Deposit Account No. 06-1050.

Respectfully submitted,

Date: 3/26/01

~~Paul A. Pysher~~ F.A. Lichauco
~~Reg. No. 40,780~~ 41,942

Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804
Telephone: (617) 542-5070
Facsimile: (617) 542-8906

20220323.doc

Version with markings to show changes made

In the claims:

Claims 3-11 have been amended as follows:

3. The method as claimed in [one of the preceding claims]claim 1, in which the predetermined coding indicates the number of transmission channels which are used simultaneously between the base station (BS) and the subscriber station (MS).

4. The method as claimed in [one of the preceding claims]claim 1, in which the data (d1, d2, d3) are transmitted via broadband transmission channels, and the predetermined coding indicates the spread factors (SF) used in the transmission channels.

5. The method as claimed in [one of the preceding claims]claim 1, in which the number (K) of blocks per service (S1, S2, S3) in each frame (fr) is signaled as an absolute statement.

6. The method as claimed in [one of claims 1 to 4]claim 1, in which the number (K) of blocks per service (S1, S2, S3) in each frame (fr) is signaled relative to the statements for the preceding frame (fr).

7. The method as claimed in [one of claims 5 or 6]claim 5, in which the number (K) of blocks per service (S1, S2, S3) is varied from frame (fr) to frame (fr) in steps of different size.

8. The method as claimed in [one of the preceding claims]claim 1, in which the predetermined coding is defined on a system-wide basis.

9. The method as claimed in [one of the preceding claims]claim 1, in which the predetermined coding is defined when setting up a connection between the base station (BS) and the subscriber station (MS).

10. The method as claimed in [one of the preceding claims]claim 1, in which the predetermined coding minimizes the number of transmission channels per connection between the base station (BS) and the subscriber station (MS).

11. The method as claimed in [one of the preceding claims]claim 1, in which the block size (B) is one bit.

Description

Method and radio communications system for data transmission via a radio interface between a base station and a subscriber station

The invention relates to a method and a radio communications system for data transmission via a radio interface between a base station and a subscriber station, in particular via broadband radio interfaces, which use a CDMA subscriber separation method and at the same time provide a number of services per connection.

In radio communications systems, messages (for example voice, video information or other data) are transmitted via a radio interface by using electromagnetic waves. The radio interface relates to a connection between a base station and subscriber stations, in which case the subscriber stations may be mobile stations or stationary radio stations. The electromagnetic waves are in this case transmitted at carrier frequencies which are in the frequency band intended for the respective system. Frequencies in the frequency band around 2000 MHz have been provided for future radio communications systems, for example the UMTS (Universal Mobile Telecommunication System), or other 3rd Generation systems.

Broadband (B = 5 MHz) radio interfaces are provided for third generation mobile radio, which use a CDMA subscriber separation method (CDMA code division multiple access) to distinguish between different transmission channels, and can provide a number of services per connection at the same time. In this case, one problem that arises is how the data for different services can be time-division multiplexed, that is to say entered in a frame, for one connection. The transmission

capacity of the radio interface must be utilized as well as possible, taking account of a wide dynamic range in the variance of the data rates for the individual services. To this end, the ETSI SMG2/UMTS L23 expert group, Tdoc SMG2 UMTS-L23 152/98, September 1-4, 1998, Helsinki, Finland, in particular on pages 11-15, has proposed that a number of transport formats be specified and that permissible combinations of these transport formats for setting up connections be defined for each connection. It is possible to change between the combinations depending on the dynamic range of the bit rates of the individual services, with such a change being signaled on a frame basis.

The frame-based adaptation of the transport format allows the dynamic range of the data traffic to be coped with with little signaling complexity. However, the signaling complexity for setting up a connection is high, and the previously defined combinations limit the variation options. Particularly in the case of data services where the traffic is in the form of bursts, this has a disadvantageous effect on the mean channel capacity, when high transmission rates sudden follow lengthy pauses. Furthermore, a process of selecting one of the combinations has not yet been solved satisfactorily.

In consequence, the invention is based on the object of specifying a method and a radio communications system, in which the coding complexity for the format information for simultaneous transmission of data for a number of services is low, and there are no relationships between the services to limit the combination options. This object is achieved by the method having the features of claim 1 and by the radio communications system having the features of claim 12. Advantageous developments of the invention can be found in the dependent claims.

According to the invention, data from a number of services can be transmitted simultaneously between the base station and the subscriber station. In this case, a service-specific block size which can be defined individually for each service is used as the smallest transmission unit. A number of blocks to be transmitted for each service occur per frame, depending on the amount of data to be transmitted at that time. This number of blocks for each service is signaled for each frame.

The arrangement of the blocks for the services in the frame is obtained from the number of services and the number of blocks per service, in accordance with predetermined coding. This mapping rule, which is referred to as coding in the following text, is unambiguous, and the receiver can thus reconstruct it without any further signaling. The format information is thus obtained unambiguously from the transmitted amount of information.

The data are entered in the frame in accordance with the predetermined coding, a frame with blocks for a number of services is transmitted via the radio interface and, at the receiving end, the data are read from the frame in accordance with the predetermined coding and the signaled number of blocks per service.

The transmission format, in the form of the block size and the number of blocks, is defined as a function of the service without any relationships between the services and can be individually and dynamically matched to the data rate of each individual service. This unlimited dynamic range allows the data to be mapped completely onto the transmission channels even if the data rates for the individual services fluctuate severely. It thus becomes feasible to transmit at the maximum possible data rate, thus allowing better utilization of the radio resources available at any given time.

The required dynamic range can be chosen freely for each of the services. It is thus possible to allow a wide variation in the allocated resources for certain services whose data rate fluctuates very rapidly. Other services can be allocated a fixed data rate, or a data rate which varies only slightly. The coding complexity for the format information can be defined on a service-specific basis, and can thus be matched very flexibly to the required dynamic range. Overall, it is no higher than with the previous method since, in particular, the signaling complexity for setting up a connection is reduced. The complex process of determining the optimum combination of transmission formats is superfluous.

According to advantageous developments of the invention, the predetermined coding indicates the sequence of the blocks, the number of transmission channels being used at the same time and/or the spread factors used in the transmission channels. These details thus do not need to be signaled but are obtained unambiguously from the block size and the number of blocks per service. This reduces the signaling complexity.

The number of blocks per service is signaled either as an absolute statement in each frame, or relative to the statements in the preceding frame. Absolute coding is more suitable for services with data rates which are low but are known a priori. The data rates can be switched very suddenly, and there is no need for initial transmission of the number of blocks. The relative coding allows very accurate matching of the data rate to the actual service data stream, and it is possible to allocate any desired number of blocks between 0 and the maximum value for the data rate.

The number of blocks per service is advantageously varied from frame to frame in steps of different size.

This means that, with absolute coding, it is possible to switch very quickly between widely differing data rates and, with relative coding, the rate of adaptation of the data rate can be varied. Allocation of different numbers of steps for each service makes it possible to take account of the specific dynamic range of data sources. Relative and absolute coding can also be combined with one another. The block size can advantageously be one bit, as a result of which the signaled number of blocks reflects the amount of information.

The predetermined coding is defined on a system-wide basis or is defined when setting up a connection between the base station and the subscriber station. System-wide definition minimizes the signaling complexity, while signaling when setting up a connection provides additional degrees of freedom.

According to one advantageous development of the invention, predetermined coding minimizes the number of transmission channels per connection between the base station and the subscriber station. This is achieved by appropriate choice of the spread factors.

Exemplary embodiments of the invention will be explained in more detail with reference to the appended drawings, in which:

Figure 1 shows a schematic illustration of a radio communications system,

Figure 2 shows a schematic illustration of requirements for three services which can be transmitted simultaneously,

Figure 3 shows a flowchart for data transmission, and

Figure 4 shows how the services are mapped onto the transmission channels at different times.

The mobile radio system illustrated in Figure 1, as an example of a radio communications system, comprises

a large number of mobile switching centers MSC which are networked with one another and/or provide access to a landline network PSTN. Furthermore, these mobile switching centers MSC are each connected to at least one device RNM for allocating radio resources. Each of these devices RNM in turn allows a connection to be set up to at least one base station BS. Such a base station BS can use a radio interface to set up a connection to subscriber stations, for example mobile stations MS or any other types of mobile or stationary terminals. At least one radio cell is formed by each base station BS.

Figure 1 shows a connection V for simultaneous transmission of user information for a number of service S1, S2, S3 between a base station BS and a mobile station MS.

An operation and maintenance center OMC provides monitoring and maintenance functions for the mobile radio system, or for parts of it. The functionality of this structure can be transferred to other radio communication systems in which the invention can be used, in particular for subscriber access networks using wire-free subscriber access.

Unidirectional data transmission from the base station BS to the mobile station MS will be explained in more detail in the following text, and the means used for this purpose will be described. The base station BS in this case represents the transmission end, and the mobile station MS the receiving end. Both ends contain the appropriate components for bidirectional data transmission. The transmission end comprises signaling means SA for producing signaling information, coding means KM for entering data for the services S1, S2, S3 in a frame, and transmission means TX for transmitting frames to the receiving end. At the receiving end, reception

means RX are provided for receiving the frames, decoding means DKM for reading the data from the frame, and signaling means SA for evaluating the signaling information. The coding, decoding and signaling means KM, DKM and SA are in the form of digital signal processing processors, while the transmission and reception means TX, RX are also formed from radio-frequency components.

Within the connection V, the data d1, d2, d3 for three different services S1, S2, S3 are transmitted simultaneously as shown in Figure 2. These three services S1, S2, S3 differ to a major extent in the possible values and the dynamic range of the data rate. The block sizes B and absolute or relative coding were chosen accordingly.

According to Figure 3, once a connection has been set up, which defines the services S1, S2, S3 to be supported and the connection context, the sequence of the services S1, S2, S3 in the transmission is defined, for example on the basis of prioritization, the delay times to be complied with and the filling of a queue. A service-specific block size B is defined in the same way. Each service i may have its own block size Bi, which defines the granularity. The data are therefore always transmitted in multiples of this block size Bi. In the extreme, the block size Bi is equal to one bit, so that the number of blocks to be transmitted coincides with the amount of data in bits.

Before each frame fr is transmitted, the number of blocks per service S1, S2, S3 contained in the next frame fr is then defined on the basis of the amount of data occurring from the data source. The maximum permissible delay for each service S1, S2, S3 and the prioritization are also significant factors in this case.

Before writing the data to the frame fr, the data for the individual services S1, S2, S3 are subjected to

individual channel-coding and to a so-called balancing algorithm in order that each service S1, S2, S3 is given its individual quality of service (QoS) within the signal which is to be transmitted and which results in a standard signal-to-noise ratio. After this, each service S1, S2, S3 has a specific gross data rate Ri, which results, for example with a frame duration of 10 ms, in the number Ni of bits to be transmitted in total per frame being:

$$Ni = 10(Ri/kbps) \text{ bits.}$$

Then, as an option, the data are encrypted over a number of frames. The encryption parameters can once again be set individually for each service S1, S2, S3. The greater the maximum permissible delay time for the service S1, S2, S3, the deeper the encryption depth that can be chosen.

The total number of bits to be transmitted in a frame fr is given by the sum Nreq of the bits from all the services S1, S2, S3.

On the assumption of the boundary condition that as few transmission channels as possible are intended to be used per connection V, the sum Nreq allows the number of required transmission channels m and the associated spread factors SFj, where j=1..m, to be derived unambiguously, since, provided m>1, all

channels except one have the minimum spread factor SF=4:

$$m = \left[\frac{Nreq}{bit/fr} \cdot \frac{1}{10240} \right] \qquad \text{where [] is a rounding operator}$$

$$SFm = Min\left(\left[\frac{40960}{\frac{Nreq}{bit/fr} - (m-1)\cdot 10440} \right], 256 \right)$$

where [] is a rounding operator for the next power of two SF = 4 for m>1 and j=1..m-1.

The constants 10240 and 40960 are related to the maximum number of bits or chips per frame with the minimum spread factor SF=4, assuming a CDMA transmission scheme in accordance with ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98, dated August 25, 1998.

This coding is known at the transmission and receiving ends and can be defined on a system-wide basis, or can be signaled when setting up a connection. Alternatively, other boundary conditions may also be specified, which lead to different coding (number m of transmission channels, the spread factors SF used and the sequence of blocks within the frame fr) than the mapping scheme for the data d1, d2, d3 to the frame fr. At the transmission and receiving ends, the coding need be an unambiguous function only of the transmitted amount of information, in the form of the number of blocks K, the number of bits K, or on the basis of blind detection during the detection process.

This predetermined coding is used when writing data to the frame fr. Only the number K of blocks per service S1, S2, S3 need be signaled from frame fr to frame fr.

The number of blocks K can be signaled absolutely or relative to the preceding frame.

Absolute:

The service i is allocated a set with z different multiples of the block size B. lb(z) bits are required to code the element used in the set.

For example if z=4: Ki1=7, Ki2=9, Ki3=10, Ki4=12. The number of blocks which can be transmitted in a frame for this service is thus either 7, 9, 10 or 12.

Relative:

The number of blocks Ki for the service i in the present frame fr is stated relative to the number of blocks in the preceding frame fr. The service is allocated a total number of z steps, which need not necessarily be the same size, in which the number of blocks can increase or decrease. lb(z) bits are also required for coding in this case. For example, if z=5: ΔKi1 = -2, ΔKi2 = -1, ΔKi3 = -0, ΔKi4 = 2, ΔKi5 = 4

Depending on the signaling, the number of blocks Ki may be reduced by two blocks or one, or may be increased by two or four blocks. However, it may also remain the same.

After transmission, which takes place via the radio interface using a CDMA subscriber separation method according to ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98, dated August 25, 1998, the data can be read from the frame at the receiving end with the aid of the coding and the signaled number of blocks K. The transmission is continued, with the capability to adapt the number of blocks K continuously, until the connection is cleared.

For the three services S1, S2, S3 shown in Figure 2, transmission in the illustrated formats is possible at

times t1 and t2 in the two instantaneous illustrations shown in Figure 4.

At the time t1, five blocks can be transmitted for the first service S1, 16 blocks for the second service S2, and one block for the third service S3. The data rates thus correspond to 2000 bits per frame fr of 10 ms (200 kbps), 9600 bits per frame fr and 800 bits per frame fr, respectively. Based on the coding rule described above, this results in m=2, with a minimum spread factor SF=4 being used for spreading the data in the first transmission channel, and the spread factor SF=16 being used to spread the data in the second transmission channel. The total available transmission capacity is thus 12 800 bits per frame fr.

The timeslots are ignored when filling the frames fr. 3/4 of the last block is thus transmitted in the first transmission channel and the last 1/4 of this block is transmitted, with a correspondingly greater spread, in the second transmission channel. Part of the second transmission channel is not required and remains free in the downlink direction (from the base station BS to the mobile station MS), that is to say the transmitter is switched off. In the uplink direction, but optionally also in the downlink direction, an equalization method is used with data rate adaptation by means of data repetition or puncturing, and the transmitter is not switched off.

The total number of bits to be transmitted per frame at the time t2 is only 9000, so that one transmission channel with the spread factor SF=4 is sufficient. One block for the first service S1, 13 blocks for the second service S2 and one block for the third service S3 are transmitted in that one transmission channel.

Patent Claims

1. A method for data transmission via a radio interface between a base station (BS) and a subscriber station (MS) in a radio communications system, in which
- data (d1, d2, d3) for a number of services (S1, S2, S3) can be transmitted simultaneously between the base station (BS) and the subscriber station (MS),
- a service-specific block size (B) is used as the smallest transmission unit,
- the number (K) of blocks for the services (S1,S2,S3) is signaled for each frame (fr),
- the arrangement of the blocks for the services (S1, S2, S3) in the frame (fr) is obtained from the number of services (S) and the number (K) of blocks per service (S1, S2, S3) on the basis of predetermined coding,
- the data (d1, d2, d3) are entered in the frame (fr) in accordance with the predetermined coding,
- a frame (fr) having blocks for a number of services (S1, S2, S3) is transmitted via the radio interface, and
- at the receiving end, the data (d1, d2, d3) are read from the frame (fr) in accordance with the signaled number (K) of blocks per service (S1, S2, S3) and the predetermined coding.

2. The method as claimed in claim 1, in which
the predetermined coding indicates the sequence of the blocks.

3. The method as claimed in one of the preceding claims, in which
the predetermined coding indicates the number of transmission channels which are used simultaneously

between the base station (BS) and the subscriber station (MS).

4. The method as claimed in one of the preceding claims, in which the data (d1, d2, d3) are transmitted via broadband transmission channels, and the predetermined coding
indicates the spread factors (SF) used in the transmission channels.

5. The method as claimed in one of the preceding claims, in which
the number (K) of blocks per service (S1, S2, S3) in each frame (fr) is signaled as an absolute statement.

6. The method as claimed in one of claims 1 to 4, in which
the number (K) of blocks per service (S1, S2, S3) in each frame (fr) is signaled relative to the statements for the preceding frame (fr).

7. The method as claimed in one of claims 5 or 6, in which
the number (K) of blocks per service (S1, S2, S3) is varied from frame (fr) to frame (fr) in steps of different size.

8. The method as claimed in one of the preceding claims, in which
the predetermined coding is defined on a system-wide basis.

9. The method as claimed in one of the preceding claims, in which

the predetermined coding is defined when setting up a connection between the base station (BS) and the subscriber station (MS).

10. The method as claimed in one of the preceding claims, in which
the predetermined coding minimizes the number of transmission channels per connection between the base station (BS) and the subscriber station (MS).
11. The method as claimed in one of the preceding claims, in which
the block size (B) is one bit.
12. A radio communications system
having at least one base station (BS) and one subscriber station (MS) which are connected via a radio interface for simultaneous data transmission of data (d1, d2, d3) for a number of services (S1, S2, S3), with a service-specific block size (B) being used as the smallest transmission unit,
having signaling means (SA) which signal the number (K) of blocks for the services (S1, S2, S3) for each frame (fr) to be transmitted,
having coding means (KM) which enter the data (d1, d2, d3) in the frame (fr) in accordance with a predetermined coding, the number of services (S1, S2, S3) and the number (K) of blocks per service (d1, d2, d3),
having transmission means (TX) which transmit a frame (fr) having blocks for a number of services (S1, S2, S3) via the radio interface, and
having decoding means (DKM) which, at the receiving end, read the data (d1, d2, d3) from the frame (fr) in accordance with the predetermined coding and the signaled number (K) of blocks per service (S1, S2, S3).

Abstract

Method and radio communications system for data transmission via a radio interface between a base station and a subscriber station

According to the invention, data for a number of services can be transmitted simultaneously between the base station and the subscriber station. In this case, a service-specific block size which can be defined individually for each service is used as the smallest transmission unit. A number of blocks to be transmitted for each service occur per frame, depending on the amount of data to be transmitted at that time. This number of blocks for each service is signaled for each frame. The arrangement of the blocks for the services in the frame is based on a predetermined coding from the number of services and the number of blocks per service. This coding is unambiguous, and the receiver can thus reconstruct it without any further signaling. The data are entered in the frame in accordance with the predetermined coding, and a frame is transmitted with blocks for a number of services via the radio interface. At the receiving end, the data are read from the frame in accordance with the predetermined coding and the signaled number of blocks per service.

Figure 4

Fig. 1

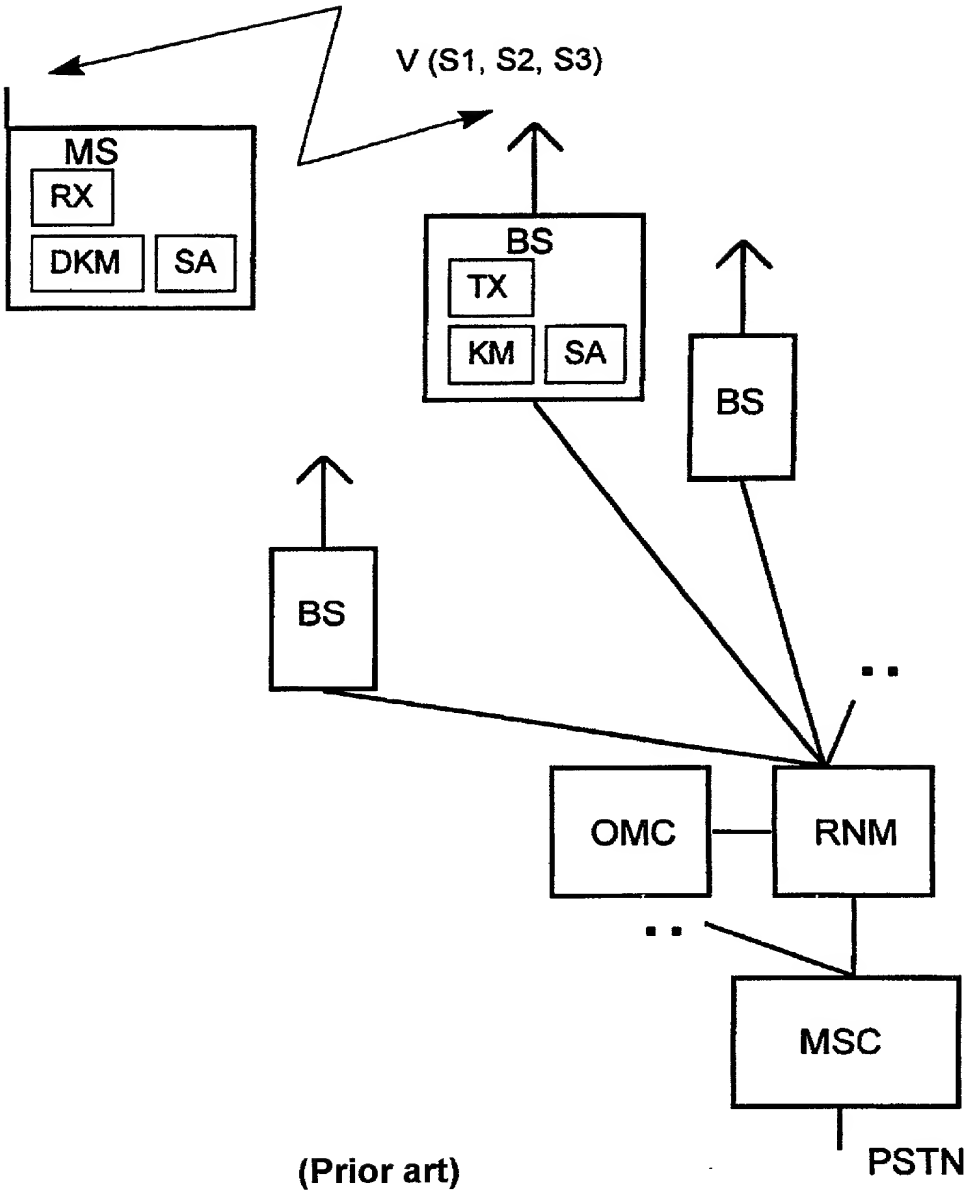

(Prior art)

Fig. 2

	Maximum gross data rate	Minimum gross data rate	Dynamic range	Block size	Coding
Service S1 (d1)	200 kbps	40 kbps	only two possible rates	400 bits	absolute with one bit
Service S2 (d2)	1200 kbps	0 kbps	high	600 bits	relative
Service S3 (d3)	80 kbps	80 kbps	constant data rate	800 bits	not required

Fig. 3

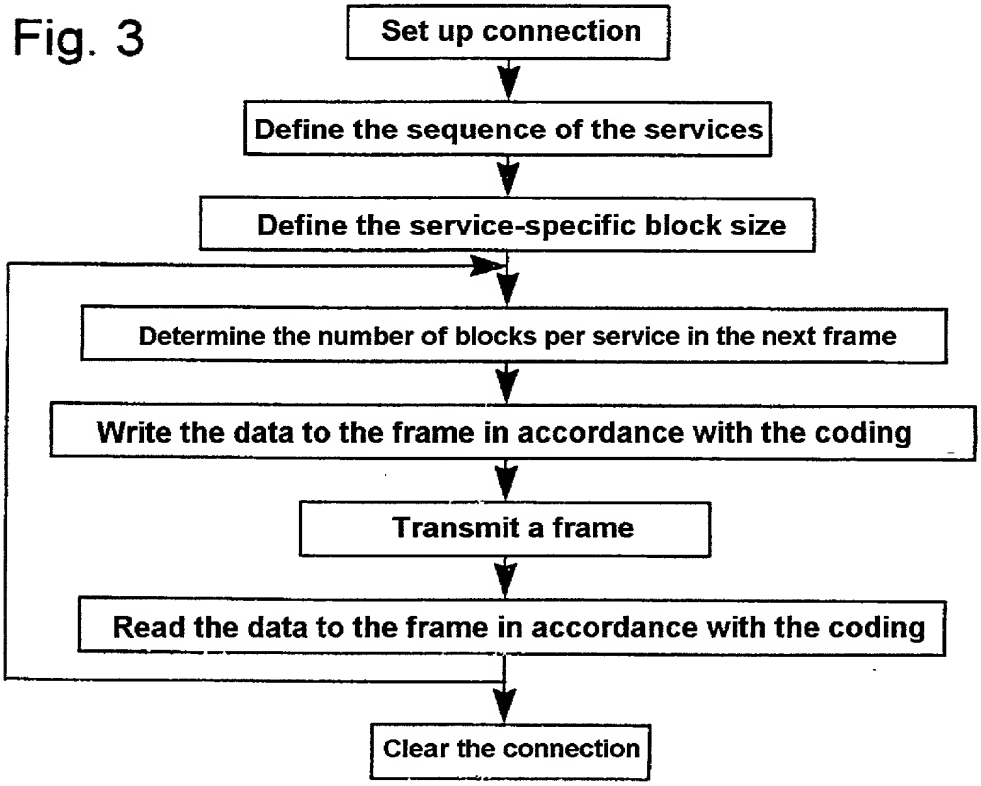

Fig. 4

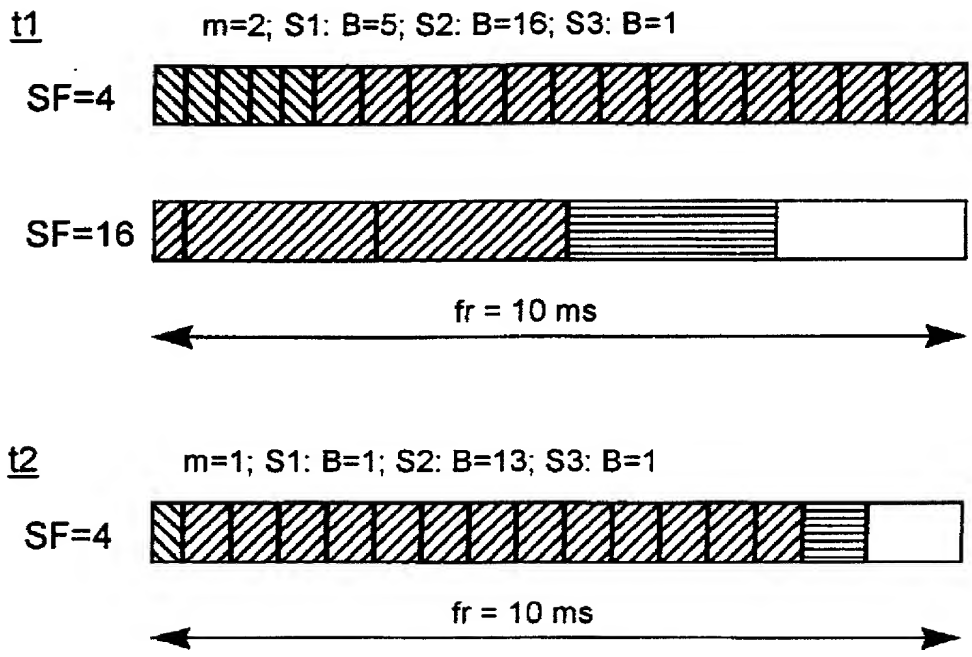
t1
m=2; S1: B=5; S2: B=16; S3: B=1
SF=4
SF=16
fr = 10 ms
t2
m=1; S1: B=1; S2: B=13; S3: B=1
SF=4
fr = 10 ms

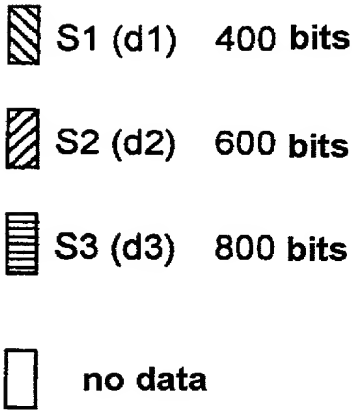
S1 (d1) 400 bits
S2 (d2) 600 bits
S3 (d3) 800 bits
no data

Declaration and Power of Attorney For Patent Application
Erklärung Für Patentanmeldungen Mit Vollmacht
German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

VERFAHREN UND FUNK-KOMMUNIKATIONSSYSTEM ZUR DATENUEBERTRAGUNG UEBER EINE FUNKSCHNITTSTELLE ZWISCHEN EINER BASISSTATION UND EINER TEILNEHMERSTATION

METHOD AND RADIO COMMUNICATIONS SYSTEM FOR TRANSMITTING DATA OVER A RADIO INTERFACE BETWEEN A BASE STATION AND A SUBSCRIBER STATION

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)
☐ hier beigefügt ist.
☒ am 01.10.1999 als
PCT internationale Anmeldung
PCT Anmeldungsnummer PCT/DE99/03168
eingereicht wurde und am _____
abgeändert wurde (falls tatsächlich abgeändert).

(check one)
☐ is attached hereto.
☒ was filed on 01.10.1999 as
PCT international application
PCT Application No. PCT/DE99/03168
and was amended on _____
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

Prior foreign appplications
Priorität beansprucht

			Priority Claimed	
19846068.6	DE	06.10.1998	☒	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
			☐	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
			☐	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35. United States Code. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occured between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE99/03168	01.10.1999		
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D, M, Y) (Anmeldedatum T, M, J)	(Status) (patentiert, anhängig, aufgegeben)	(Status) (patented, pending, abandoned)
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D,M,Y) (Anmeldedatum T, M; J)	(Status) (patentiert, anhängig, aufgeben)	(Status) (patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: *(Name und Registrationsnummer anführen)*

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

And I hereby appoint

Customer No. 26161

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: *(name and telephone number)*

Ext. _____

Postanschrift:

Send Correspondence to:

Fish & Richardson P.C.
225 Franklin Street 02110-2804 Boston, MA
Telephone: +1 617-542 5070 and Facsimile +1 617-542 8906
or
Customer No. 26161

Voller Name des einzigen oder ursprünglichen Erfinders:	Full name of sole or first inventor:
ARMIN SITTE	ARMIN SITTE
Unterschrift des Erfinders / Datum: X 12.3.01	Inventor's signature / Date
Wohnsitz: BERLIN, DEUTSCHLAND DEX	Residence: BERLIN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: PRENZLAUER ALLEE 237	Post Office Addess: PRENZLAUER ALLEE 237
10405 BERLIN	10405 BERLIN
Voller Name des zweiten Miterfinders (falls zutreffend): Dr. VOLKER SOMMER	Full name of second joint inventor, if any: Dr. VOLKER SOMMER
Unterschrift des Erfinders / Datum: X 12.3.01	Second Inventor's signature / Date
Wohnsitz: BERLIN, DEUTSCHLAND DEX	Residence: BERLIN, GERMANY
Staatsangehörigkeit: DE	Citizenship: DE
Postanschrift: SCHWABSTEDTER WEG 6	Post Office Address: SCHWABSTEDTER WEG 6
13503 BERLIN	13503 BERLIN

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).